


Sewatek H-series, Metal frame

Environmental Product Declaration

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025



Rakennustiedon EPD
EPD Registration number: RTS_362_25
Date of issue: 5.3.2025
Date of expiry: 5.3.2030

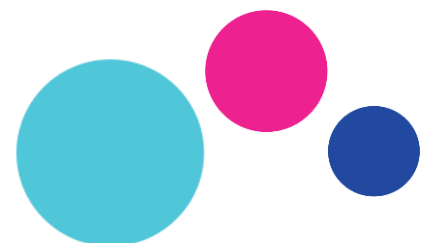

General information

Manufacturer information

Manufacturer	Sewatek Oy
Address	Sepäntie 4, 07230 Askola, Finland
Website	https://www.sewatek.com/


Product identification

Product name	Sewatek Fire Stop
Declared unit	1 Unit of Finished Product
Specific product name	Sewatek Fire Stop: Sewatek H-series, metal frame
Place(s) of production	Askola, Finland

EPD information

Construction products EPDs may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

EPD program operator	Rakennustieto Oy, RTS, Malminkatu 16 A, 00100 Helsinki, Finland
EPD standards	This EPD is in accordance with EN 15804+A2 and ISO 14025 standards.
Product category rules	The CEN standard EN 15804 serves as the core PCR. RTS PCR 2020
EPD author	Natalia Pennanen, Anni Viitala, Granlund Oy, Malminkaari 21, 00701 Helsinki, Finland
EPD verification	Independent verification of this EPD and data, according to ISO 14025: External verification
Verification date	3.2.2025
EPD verifier	Mari Kirss, Rangi Maja OÜ
EPD number	RTS_362_25
Publishing date	5.3.2025
EPD valid until	5.3.2030

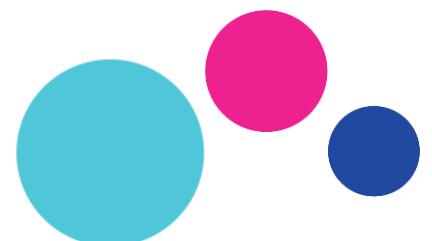

Verified according to the requirements of EN 15804+A2 (product category rules) Independent verification of the declaration, according to EN ISO 14025:2010	
<input checked="" type="checkbox"/> External	<input type="checkbox"/> Internal
Third party verifier: <i>Mari Kirss</i> Mari <u>Kirss</u> , Rangi Maja OÜ, Tallinn, Estonia , 03.02.2025	



Jukka Seppänen
RTS EPD Committee Secretary



Laura Apilo
Managing Director



Product information

Product description

The studied products are fire stop products. The assessment of environmental impacts has been made for following product types.

Products	Product variations covered in EPD	Declared unit	Intended Application	Product standards
H-series, metal frame	HM160-40/9_B HM180-75/13_B HM240-125/25_B	1 unit of finished product	Modular H-series products are ETA assessed and CE-marked fire stops installed in on-site casting. The product consists of Sewatek penetration pipe, end caps and steel installation frame. The product can be used for metal and composite pipes through concrete floors. Can be used to accurately place multiple pipe penetrations with specific distances. Typical applications include heat and water pipes between apartments.	ETA: ETA: 26.8.2024 / DoP SWT-12_0924



HM160-40/9_B



HM240-125/25_B



Product raw material composition and technical information

Main substances of the products are presented in table below presenting raw materials per 1 unit of finished product.

MAIN MATERIALS OF FIRE STOP, SEWATEK H-SERIES, METAL FRAME

Raw Materials	HM160-40/9, % of weight	HM180-75/13, % of weight	HM240-125/25, % of weight
Steel	81 %	74 %	45 %
Thermoplastic	12 %	24 %	53 %
Cellular rubber	6 %	1 %	1 %
Other Plastics	1 %	1 %	<0,1 %
Glue	1 %	1 %	1 %

Packaging material composition and technical information


Main packaging materials of products are presented in the table below.

MAIN PACKAGING MATERIALS PER PRODUCT

Packaging material	% of weight	Origin
Wood pallet	22 %	EU
Plastic	2 %	EU
Cardboard	76 %	FIN

Substances, reach - very high concern

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

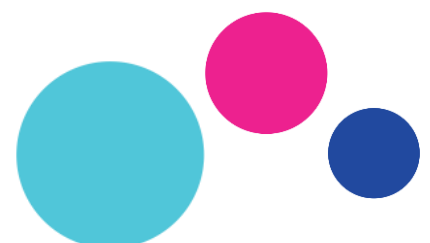

Life-Cycle assessment

Life-Cycle assessment information


Period for data	1 year, 2023
-----------------	--------------

Declared unit

Declared unit	1 Unit of Finished Product
Declaration covers	This declaration covers the life cycle stages from cradle to gate with options (A4 and A5), modules C1–C4, and module D
Product weight	HM160-40/9_B: 0,584 kg HM180-75/13_B: 0,708 kg HM240-125/25_B: 1,712 kg

System boundary

Studied system covers the following steps of life cycle according to EN 15804: **A1** Raw material supply, **A2** Transport, **A3** Manufacturing, **A4** Transportation of the product to construction site, **A5** Installation to building, **C1** Deconstruction, **C2** Transportation of end-of-life **C3** Waste processing and **C4** Disposal. In addition, the benefits and loads beyond the system boundary of stage **D** consist of product reuse, recovery and recycling. System boundary describing the input and output flows is shown below:

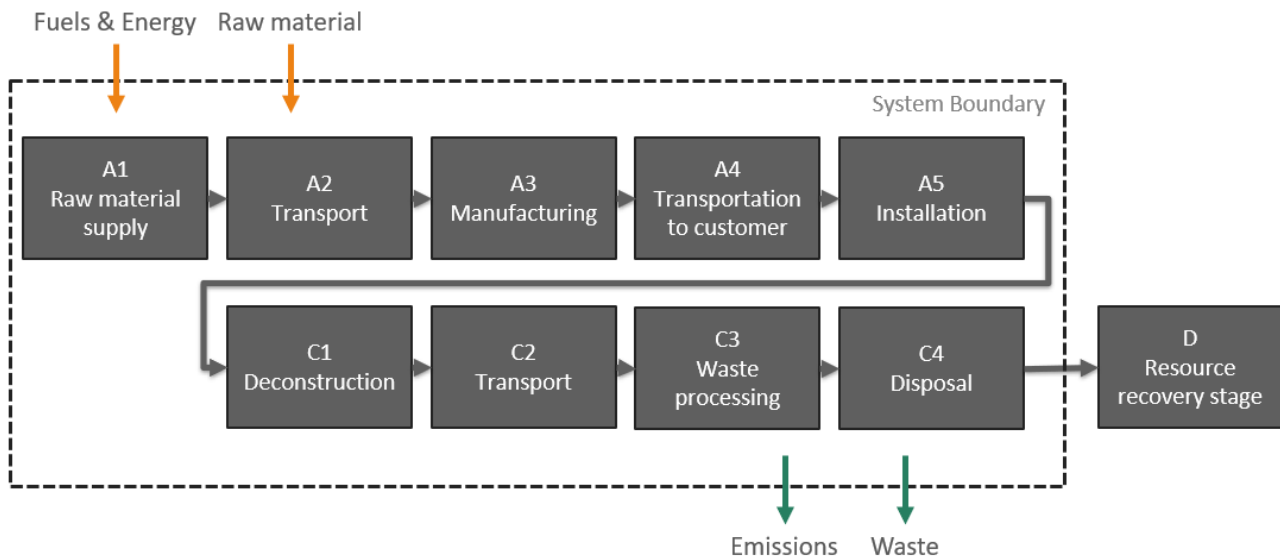


LCA System Boundary of studied products



The end-of-waste point of the studied product is the step when the material is used as fuel in an incineration plant or when recycled material is handled in the collection and sorting plant. The end-of-waste point of the waste flows in the A3 module is the step when the materials are collected and handled in the sorting plant. The end-of-waste point of the packaging materials collected for recycling in the A5 module is the point when the materials are collected and handled in the sorting plant

Production processes on the Sewatek ´s production site cover following manufacturing processes; raw material supply (plastics, rubber and steel), pipe and intermediate product manufacturing including optimization and cutting as well as component collection, assembly of pipes and components and packaging the final product. After that, products will be transported to the client. The production processes of studied products are presented in the following figure.

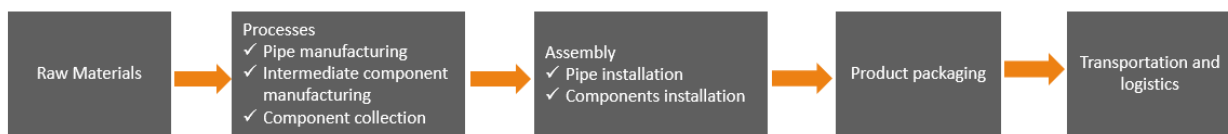

The production processes of studied products



Studied system covers the following steps of life cycle according to EN 15804:

	Product Stage			Con-struction Process Stage		Use Stage							End-of-Life Stage				Benefits and loads beyond the system boundary		
	Raw material supply	Transport	Manufacturing	Transport to building	Installation to building	Use/applications	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction/demolition	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling
	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D	D	D
Included	X	X	X	X	x								X	X	X	X	X	X	X
Relevancy	R	R	R	R	R	NR	NR	NR	NR	NR	NR	NR	R	R	R	R	R	R	R


	Mandatory
	Mandatory as per the RTS PCR section 6.2.1 rules and terms
	Optional modules based on scenarios

The study does not omit any life cycle stages, processes or data needs that are mandatory according to EN 15804 and RTS PCR. The study excludes following life cycle stages which are optional according to EN 15804 and RTS PCR.

- B1 Use
- B2 Maintenance
- B3 Repairs
- B4 Replacement
- B5 Refurbishment
- B6 Operational energy use
- B7 Operational water use

Cut-Off criteria

This study follows the cut-off criteria stated in RTS PCR and EN 15804 -standard. This study does not exclude any modules or processes which represent more than 1 % of the emissions of the studied life cycle stage. The study does not exclude any hazardous materials or substances.

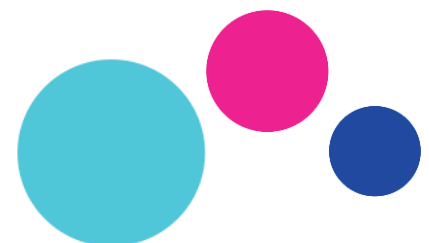

Excluded processes and the criteria for exclusion are given in the following table. Machines and facilities (capital goods) required for and during production are excluded, as is transportation of employees.

Phase	Process excluded from study	Quantified contribution from process
A1-A3	Glue (low contribution to the total mass of product)	Mass < 0,9%
A1-A3	Rubber gloves (low contribution to the total mass of product)	Mass < 0,01 %
A1-A3	Glycol, refrigerant (low contribution to the total mass of product)	Mass < 0,0014 %

Allocation, estimates and assumptions

Allocation rules used are made according to the ISO14044:2006. Allocation is avoided when possible and when necessary, allocation is made based on physical shares and also avoiding double calculations. Allocation is required if the production process produces more than one product and the flows of materials, energy and waste cannot be separately measured for the studied product. Allocation used in generic data sources follow the requirements of the EN 15804 -standard. It should be noticed that the allocation method 'allocation, cut-off by classification' has been used for Ecoinvent 3.8 data, which complies with EN 15804. Avoiding allocation could not be avoided for following inputs as the information was only measured on factory process level.

- Electricity consumption: only measured on factory level.
- Waste: only measured on factory level.
- Packaging materials: only measured on factory level.

The inputs were allocated to the studied product based on production volume (mass in kilograms).

According to EN 15804, flows leaving the system at the end-of-waste boundary of the product stage (A1-A3) are allocated as co-products. According to EN 15804, processes that have a very low contribution to the overall revenue may be neglected in co-product allocation. Materials sent for recycling or energy recovery from manufacturing were not allocated, as it was estimated that their contribution to the overall revenue is very marginal. No other allocations were made in this assessment.

KEY ASSUMPTIONS

The scenarios included are currently in use and are representative for one of the most likely scenario alternatives.

A1 Raw Materials: Recycled content of steel raw material was assumed to be 35 % for stainless steel products. (SYKE 2023.)

A2 Transport: Information on transport distances has been collected based on information provided by material suppliers. Typical, generic values for transport equipment were used when exact data was missing. Some generic emissions values of raw materials include generic and conservative assumptions for



transportation of raw materials. It was assumed that these emission values include transportation from manufacturers to suppliers.

A4 Transport to building: The transportation from the production site in Askola to Helsinki was included to the study. It was assumed that no losses are generated during transportation.

A5 Installation to building: It can be assumed that there are no significant environmental impacts (energy or water use) caused by installation phase. Waste materials generated by use and handling of packaging materials were included to the study.


C1-4 End of life scenario: This stage was assumed based on the common practices of construction products (SYKE 2023). The material flows at the end of life were assumed to be following:

- C1: It was assumed that the products are disassembled as part of the concrete structure and processed according to the main material.
- C2: Transportation distance 75 km road driving by lorry (SYKE 2023).
- C3-4: It was assumed that the products are disassembled as part of the concrete structure and processed according to the main material.
 - Products integrated in a concrete structure: In the end-of-life stage, the concrete structure is crushed in the waste treatment plant. It was assumed that metal parts of the products can be separated from the crushed concrete and recycled as steel scrap. It was assumed that other materials included in the product are crushed into very small parts and are not separated from crushed concrete. After the crushing process, crushed concrete including small parts of product's materials end up being recycled as aggregate.
 - It was assumed that 5 % of recyclable or recoverable materials end up as material loss.
- Module D covers the net benefits and loads arising from the reuse of products or the recycling or recovery of energy from end-of-waste state materials.
 - Recycling: Benefits from the recycling of materials of the products among crushed concrete were included to the assessment. This means that benefits from avoided primary gravel production due to the recycling of the crushed concrete and materials of the studied product that cannot be separated, are included to the Module D. Benefits from the recycling of steel materials were included to the assessment. Only share of virgin raw materials in the product composition were included to the module D. This means that benefits from avoided primary steel production due to the recycling of steel at end of life was included to the assessment.

Validation of data

The quality requirements for the life cycle assessment were set according to the EN ISO 14044 standard (4.2.3.6) and EN 15804 standard (6.3.7).

This LCA study follows the standard EN 15804:2012+A2:2019 and RTS PCR and no decisions are made based on the values. The study does not consider long-term emissions (i.e. over 100 years). Characterization factors CML-IA version 4.1 have been used throughout the study. Impact assessment characterization factors are aligned with EF 3.0.

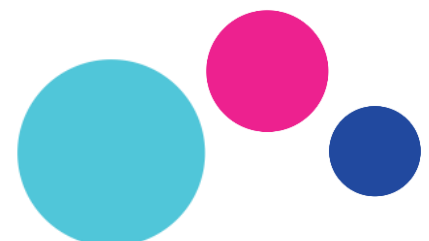

The calculations were conducted using One Click LCA -tool which is a cloud-based LCA software in compliancy with EN 15804 -standard.

Procedures for collection process specific data

Production specific data was collected directly from the manufacturer's production plant. The data represents the production of the studied product at the plant from the materials transported to the facility and represents 1 year average. The data represents the year 2023, which was the latest year with full year data. All gathered data was used without excluding categories in advance following the system boundaries set in earlier chapters.

Criteria for choosing the generic data

Generic data that was used for upstream and downstream processes represents complementary data from Ecoinvent 3.8 database.

The datasets were chosen to represent the studied system as closely as possible. When available supplier specific information was used for instance in form of EN 15804 EPDs or emissions profile of local energy supplier. When supplier-specific information was not available the information sources were chosen based on their technical and geographical representativeness. Only when country specific or European data has not been available has global level data been used (concerns mainly data from ecoinvent 3.8)

As up-to-date data as possible was chosen and no more than five years old for producer specific data and ten years for generic data was used.



Environmental impact data

Sewatek H-series, metal frame HM160-40/9


CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – total	kg CO ₂ e	1,97E+00	3,81E-03	1,05E-01	2,51E-04	6,43E-03	1,22E-02	8,63E-04	-3,99E-01
GWP – fossil	kg CO ₂ e	2,07E+00	3,81E-03	2,41E-03	2,51E-04	6,43E-03	1,22E-02	8,62E-04	-3,99E-01
GWP – biogenic	kg CO ₂ e	-1,02E-01	0,00E+00	1,02E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-1,39E-05
GWP – LULUC	kg CO ₂ e	1,37E-03	1,41E-06	4,03E-06	2,50E-08	2,37E-06	1,51E-05	8,31E-07	4,28E-04
Ozone depletion pot.	kg CFC ₁₁ e	4,60E-08	8,76E-10	2,21E-10	5,37E-11	1,48E-09	2,20E-09	3,24E-10	-1,15E-08
Acidification potential	mol H ⁺ e	6,22E-03	1,61E-05	9,67E-06	2,61E-06	2,72E-05	1,47E-04	7,87E-06	-1,50E-03
EP-freshwater ³⁾	kg Pe	1,52E-05	3,12E-08	5,61E-08	8,32E-10	5,26E-08	5,50E-07	1,03E-08	-3,15E-06
EP-marine	kg Ne	1,43E-03	4,79E-06	2,82E-06	1,16E-06	8,09E-06	3,42E-05	2,71E-06	-1,00E-05
EP-terrestrial	mol Ne	1,56E-02	5,29E-05	2,83E-05	1,27E-05	8,92E-05	3,91E-04	2,98E-05	-4,19E-03
POCP (“smog”)	kg NMVOCe	4,83E-03	1,69E-05	8,38E-06	3,48E-06	2,85E-05	1,09E-04	8,67E-06	-2,29E-03
ADP-minerals & metals	kg Sbe	4,15E-05	8,93E-09	2,04E-08	1,27E-10	1,51E-08	1,32E-06	2,24E-09	-1,25E-05
ADP-fossil resources	MJ	4,40E+01	5,72E-02	2,30E-02	3,38E-03	9,65E-02	2,00E-01	2,26E-02	-3,34E+00
Water use ²⁾	m ³ e depr.	5,23E-01	2,56E-04	3,95E-04	9,08E-06	4,32E-04	2,78E-03	8,68E-05	1,59E-01

- 1) GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential.
- 2) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.
- 3) Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e.

USE OF NATURAL RESOURCES

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Renew. PER as energy	MJ	5,88E+00	6,45E-04	1,57E-03	1,93E-05	1,09E-03	2,41E-02	2,46E-04	-4,85E-01
Renew. PER as material	MJ	6,68E-01	0,00E+00	-6,68E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	6,54E+00	6,45E-04	-6,66E-01	1,93E-05	1,09E-03	2,41E-02	2,46E-04	-4,85E-01

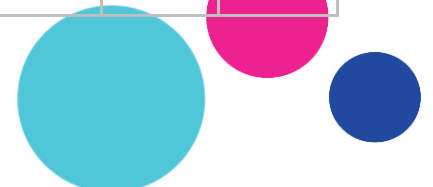

Non-re. PER as energy	MJ	4,06E+01	5,72E-02	2,30E-02	3,38E-03	9,66E-02	2,00E-01	2,26E-02	-3,34E+00
Non-re. PER as material	MJ	3,55E+00	0,00E+00	-8,06E-02	0,00E+00	0,00E+00	-3,47E+00	0,00E+00	0,00E+00
Total use of non-ren. PER	MJ	4,41E+01	5,72E-02	-5,76E-02	3,38E-03	9,66E-02	-3,27E+00	2,26E-02	-3,34E+00
Secondary materials	kg	1,46E-01	1,59E-05	3,45E-05	1,32E-06	2,68E-05	1,62E-04	5,60E-06	2,78E-01
Renew. secondary fuels	MJ	6,50E-04	1,60E-07	2,12E-07	4,32E-09	2,70E-07	8,04E-06	1,72E-07	-5,58E-05
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³	1,29E-02	7,41E-06	1,00E-05	2,05E-07	1,25E-05	1,52E-04	2,46E-05	-1,13E-02

1) PER = primary energy resources; Non-ren = Non renewable

END OF LIFE – WASTE

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste	kg	4,11E-02	7,59E-05	1,68E-04	4,52E-06	1,28E-04	9,01E-04	0,00E+00	-2,47E-01
Non-hazardous waste	kg	4,68E-01	1,25E-03	3,43E-03	3,18E-05	2,10E-03	4,96E-01	1,40E-01	-8,08E-01
Radioactive waste	kg	4,19E-04	3,83E-07	1,30E-07	2,38E-08	6,46E-07	7,76E-07	0,00E+00	1,78E-07

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	5,74E-02	0,00E+00	4,73E-02	0,00E+00	0,00E+00	9,13E-01	0,00E+00	0,00E+00
Materials for energy recycling	kg	6,17E-02	0,00E+00	1,30E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

BIOGENIC CARBON CONTENT

PRODUCT'S BIOGENIC CARBON CONTENT AT THE FACTORY GATE

Biogenic carbon content	Unit (expressed per functional unit or per declared unit)
Biogenic carbon content in product	0 kg
Biogenic carbon content in accompanying packaging	0,0073 kg



Sewatek H-series, metal frame HM180-75/13


CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – total	kg CO ₂ e	2,50E+00	4,63E-03	1,27E-01	3,05E-04	7,48E-03	1,39E-02	1,02E-03	-4,44E-01
GWP – fossil	kg CO ₂ e	2,62E+00	4,62E-03	2,95E-03	3,05E-04	7,48E-03	1,38E-02	1,02E-03	-4,44E-01
GWP – biogenic	kg CO ₂ e	-1,24E-01	0,00E+00	1,24E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-1,68E-05
GWP – LULUC	kg CO ₂ e	1,61E-03	1,71E-06	4,95E-06	3,04E-08	2,76E-06	1,71E-05	9,83E-07	4,74E-04
Ozone depletion pot.	kg CFC ₁₁ e	4,88E-08	1,06E-09	2,71E-10	6,52E-11	1,72E-09	2,55E-09	3,85E-10	-1,29E-08
Acidification potential	mol H ⁺ e	8,00E-03	1,96E-05	1,18E-05	3,17E-06	3,17E-05	1,66E-04	9,33E-06	-1,67E-03
EP-freshwater ³⁾	kg Pe	2,14E-05	3,79E-08	6,85E-08	1,01E-09	6,12E-08	6,14E-07	1,21E-08	-3,52E-06
EP-marine	kg Ne	1,80E-03	5,82E-06	3,45E-06	1,40E-06	9,41E-06	3,88E-05	3,22E-06	-1,25E-05
EP-terrestrial	mol Ne	1,94E-02	6,42E-05	3,46E-05	1,54E-05	1,04E-04	4,44E-04	3,54E-05	-4,67E-03
POCP (“smog”)	kg NMVOCe	6,30E-03	2,05E-05	1,03E-05	4,23E-06	3,32E-05	1,24E-04	1,03E-05	-2,55E-03
ADP-minerals & metals	kg Sbe	4,58E-05	1,08E-08	2,48E-08	1,55E-10	1,75E-08	1,47E-06	2,64E-09	-1,39E-05
ADP-fossil resources	MJ	5,66E+01	6,94E-02	2,82E-02	4,10E-03	1,12E-01	2,29E-01	2,68E-02	-3,72E+00
Water use ²⁾	m ³ e depr.	7,54E-01	3,11E-04	4,82E-04	1,10E-05	5,03E-04	3,11E-03	1,02E-04	1,75E-01

- 2) GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential.
- 3) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.
- 4) Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e.

USE OF NATURAL RESOURCES

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Renew. PER as energy	MJ	6,98E+00	7,82E-04	1,92E-03	2,34E-05	1,27E-03	2,68E-02	2,88E-04	-5,39E-01
Renew. PER as material	MJ	8,08E-01	0,00E+00	-8,08E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	7,79E+00	7,82E-04	-8,06E-01	2,34E-05	1,27E-03	2,68E-02	2,88E-04	-5,39E-01
Non-re. PER as energy	MJ	5,04E+01	6,94E-02	2,82E-02	4,10E-03	1,12E-01	2,29E-01	2,68E-02	-3,71E+00

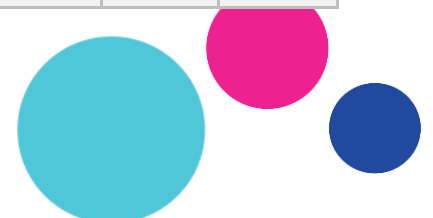

Non-re. PER as material	MJ	6,30E+00	0,00E+00	-9,76E-02	0,00E+00	0,00E+00	-6,20E+00	0,00E+00	0,00E+00
Total use of non-ren. PER	MJ	5,67E+01	6,94E-02	-6,94E-02	4,10E-03	1,12E-01	-5,97E+00	2,68E-02	-3,71E+00
Secondary materials	kg	1,67E-01	1,93E-05	4,21E-05	1,61E-06	3,12E-05	1,81E-04	6,58E-06	3,09E-01
Renew. secondary fuels	MJ	6,15E-04	1,95E-07	2,59E-07	5,25E-09	3,15E-07	8,97E-06	2,00E-07	-6,20E-05
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³	1,84E-02	9,00E-06	1,22E-05	2,49E-07	1,45E-05	1,76E-04	2,92E-05	-1,25E-02

5) PER = primary energy resources; Non-ren = Non renewable

END OF LIFE – WASTE

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste	kg	7,19E-02	9,21E-05	2,05E-04	5,49E-06	1,49E-04	1,00E-03	0,00E+00	-2,75E-01
Non-hazardous waste	kg	5,46E-01	1,51E-03	4,19E-03	3,86E-05	2,45E-03	5,98E-01	1,68E-01	-8,98E-01
Radioactive waste	kg	4,88E-04	4,65E-07	1,59E-07	2,89E-08	7,51E-07	8,62E-07	0,00E+00	1,36E-07

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	6,95E-02	0,00E+00	5,76E-02	0,00E+00	0,00E+00	1,06E+00	0,00E+00	0,00E+00
Materials for energy recycling	kg	7,47E-02	0,00E+00	1,60E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

BIOGENIC CARBON CONTENT

PRODUCT'S BIOGENIC CARBON CONTENT AT THE FACTORY GATE

Biogenic carbon content	Unit (expressed per functional unit or per declared unit)
Biogenic carbon content in product	0 kg
Biogenic carbon content in accompanying packaging	0,0073 kg



Sewatek H-series, metal frame HM240-125/25


CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP – total	kg CO ₂ e	5,08E+00	1,12E-02	3,07E-01	7,36E-04	1,48E-02	2,34E-02	2,21E-03	-6,69E-01
GWP – fossil	kg CO ₂ e	5,37E+00	1,12E-02	7,29E-03	7,36E-04	1,48E-02	2,34E-02	2,21E-03	-6,70E-01
GWP – biogenic	kg CO ₂ e	-3,00E-01	0,00E+00	3,00E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
GWP – LULUC	kg CO ₂ e	5,46E-03	4,12E-06	1,21E-05	7,33E-08	5,47E-06	2,80E-05	2,12E-06	6,99E-04
Ozone depletion pot.	kg CFC ₁₁ e	9,77E-07	2,57E-09	6,68E-10	1,57E-10	3,41E-09	4,92E-09	8,54E-10	-2,04E-08
Acidification potential	mol H ⁺ e	2,08E-02	4,73E-05	2,92E-05	7,65E-06	6,28E-05	2,73E-04	2,04E-05	-2,55E-03
EP-freshwater ³⁾	kg Pe	9,87E-05	9,15E-08	1,70E-07	2,44E-09	1,21E-07	9,44E-07	2,52E-08	-5,55E-06
EP-marine	kg Ne	4,43E-03	1,41E-05	8,51E-06	3,39E-06	1,87E-05	6,69E-05	7,05E-06	-3,34E-05
EP-terrestrial	mol Ne	4,90E-02	1,55E-04	8,54E-05	3,71E-05	2,06E-04	7,60E-04	7,75E-05	-7,13E-03
POCP (“smog”)	kg NMVOCe	1,53E-02	4,96E-05	2,53E-05	1,02E-05	6,59E-05	2,13E-04	2,25E-05	-3,85E-03
ADP-minerals & metals	kg Sbe	1,07E-04	2,62E-08	6,17E-08	3,73E-10	3,48E-08	2,20E-06	5,52E-09	-2,08E-05
ADP-fossil resources	MJ	1,40E+02	1,68E-01	6,96E-02	9,91E-03	2,23E-01	4,17E-01	5,89E-02	-5,65E+00
Water use ²⁾	m ³ e depr.	2,24E+00	7,51E-04	1,19E-03	2,66E-05	9,97E-04	4,88E-03	2,12E-04	2,53E-01

- 6) GWP = Global Warming Potential; EP = Eutrophication potential; POCP = Photochemical ozone formation; ADP = Abiotic depletion potential.
- 7) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.
- 8) Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e.

USE OF NATURAL RESOURCES

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Renew. PER as energy	MJ	1,73E+01	1,89E-03	4,75E-03	5,66E-05	2,51E-03	4,06E-02	5,93E-04	-8,11E-01
Renew. PER as material	MJ	1,95E+00	0,00E+00	-1,95E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renew. PER	MJ	1,93E+01	1,89E-03	-1,95E+00	5,66E-05	2,51E-03	4,06E-02	5,93E-04	-8,11E-01
Non-re. PER as energy	MJ	1,19E+02	1,68E-01	6,96E-02	9,91E-03	2,23E-01	4,17E-01	5,89E-02	-5,65E+00

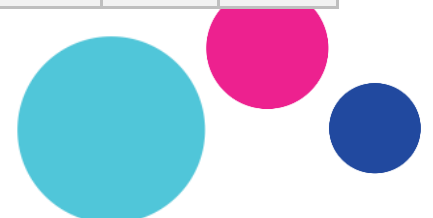

Non-re. PER as material	MJ	2,17E+01	0,00E+00	-2,36E-01	0,00E+00	0,00E+00	-2,15E+01	0,00E+00	0,00E+00
Total use of non-ren. PER	MJ	1,40E+02	1,68E-01	-1,66E-01	9,91E-03	2,23E-01	-2,11E+01	5,89E-02	-5,65E+00
Secondary materials	kg	3,08E-01	4,66E-05	1,04E-04	3,88E-06	6,19E-05	2,86E-04	1,38E-05	4,60E-01
Renew. secondary fuels	MJ	3,15E-03	4,70E-07	6,38E-07	1,27E-08	6,24E-07	1,38E-05	4,02E-07	-9,31E-05
Non-ren. secondary fuels	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of net fresh water	m ³	5,42E-02	2,17E-05	3,03E-05	6,02E-07	2,89E-05	3,45E-04	6,43E-05	-1,89E-02

9) PER = primary energy resources; Non-ren = Non renewable

END OF LIFE – WASTE

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste	kg	1,95E-01	2,23E-04	5,08E-04	1,33E-05	2,96E-04	1,49E-03	0,00E+00	-4,10E-01
Non-hazardous waste	kg	3,82E+00	3,66E-03	1,04E-02	9,32E-05	4,86E-03	1,42E+00	3,81E-01	-1,35E+00
Radioactive waste	kg	1,11E-03	1,12E-06	3,92E-07	6,97E-08	1,49E-06	1,29E-06	0,00E+00	-4,70E-07


END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling	kg	1,68E-01	0,00E+00	1,44E-01	0,00E+00	0,00E+00	2,11E+00	0,00E+00	0,00E+00
Materials for energy recycling	kg	1,80E-01	0,00E+00	3,90E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

BIOGENIC CARBON CONTENT

PRODUCT'S BIOGENIC CARBON CONTENT AT THE FACTORY GATE

Biogenic carbon content	Unit (expressed per functional unit or per declared unit)
Biogenic carbon content in product	0 kg
Biogenic carbon content in accompanying packaging	0,0073 kg

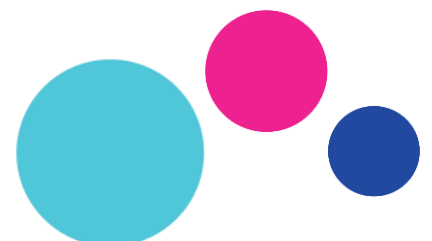


Scenario documentation

MANUFACTURING ENERGY SCENARIO DOCUMENTATION

Energy type	Object	GWP value	Data quality	Representativeness
Renewable electricity	Electricity data quality and CO2 emission kg CO2 eq. / kWh The factory is heated by electricity	0,101 kg CO2 e / kWh	Electricity production, photovoltaic, 570kWp open ground installation, multi-Si (Reference product: electricity, low voltage) Electricity production, hydro, run-of-river (Reference product: electricity, high voltage) Electricity production, wind, 1-3MW turbine, onshore (Reference product: electricity, high voltage) EN15804+A1, EN15804+A2, Finland, 2021. Ecoinvent 3.8.	The processes included in the data set are well representative for the geography (Finland)

TRANSPORTATION SCENARIO

Parameter	Value
Fuel type and consumption of vehicle used for transport	Freight, lorry: diesel, maximum load capacity 32 t. Specific transport emissions 0,064 kg CO ₂ equiv. / tn x km
Distance (km)	Average transport distance 63 km
Capacity utilization (%)	100 % for truck
Density of transported products (kg/m ³)	Density varies depending on the mass and size of the product type
Volume capacity utilization factor	1

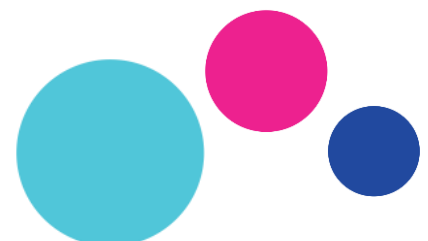

INSTALLATION OF THE PRODUCT IN THE BUILDING

Parameter	Unit
Ancillary materials for installation (specified by material)	-
Water use	0 m ³
Other resource use	0 kWh (energy use is insignificant)
Quantitative description of energy type (regional mix) and consumption during the installation process	
Waste materials generated by product installation	Packaging materials per 1 unit of product Packaging material Plastic 0,0001 – 0,0014 kg Cardboard 0,0052 – 0,0503 kg Wood 0,0015 – 0,0146 kg

END-OF-LIFE SCENARIO

Process flow		H-series, metal frame		
		HM160-40/9	HM180-75/13	HM240-125/25
Collection process specified by type	kg collected separately	0,584	0,708	1,712
	kg collected with mixed construction waste			
Recovery system specified by type	kg for reuse			
	kg for recycling	0,467	0,567	1,369
	kg for energy recovery			
Disposal specified by type	kg material for final deposition	0,117	0,142	0,342



Bibliography

- 1 ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations. Principles and procedures.
- 2 ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.
- 3 ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines.
- 4 EN 15804:2012+A2:2019 Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.
- 5 RTS Guidelines and RTS PCR 2020
- 6 Ecoinvent database v3.8 (2021)
- 7 EPD Background Report
- 8 Emissions database for construction, Finnish Environmental Institute, 2023. Available at: <https://co2data.fi/>



ANNEX 1: EPD results by RTS PCR requirements

SEWATEK H-SERIES, METAL FRAME HM160-40/9


Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Global Warming Potential total	kg CO ₂ e / kg	3,38E+00	6,53E-03	1,80E-01	4,30E-04	1,10E-02	2,09E-02	1,48E-03	-6,84E-01
Abiotic depletion potential (ADP-elements) for non fossil resources	kg Sbe / kg	7,11E-05	1,48E-08	3,46E-08	2,14E-10	2,50E-08	2,26E-06	3,75E-09	-2,14E-05
Abiotic depletion potential (ADP-fossil fuels) for fossil resources (+A2)	MJ / kg	7,54E+01	9,80E-02	3,94E-02	5,79E-03	1,65E-01	3,43E-01	3,87E-02	-5,71E+00
Water use	m ³ e depr. / kg	8,96E-01	4,39E-04	6,77E-04	1,56E-05	7,40E-04	4,76E-03	1,49E-04	2,72E-01
Use of secondary materials	kg / kg	2,50E-01	2,72E-05	5,91E-05	2,26E-06	4,59E-05	2,78E-04	9,60E-06	4,76E-01
Biogenic carbon content in product	kg C / kg	0,00E+00	N/A	N/A	N/A	N/A	N/A	N/A	N/A

SEWATEK H-SERIES, METAL FRAME HM180-75/13

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Global Warming Potential total	kg CO ₂ e / kg	3,53E+00	6,54E-03	1,79E-01	4,31E-04	1,06E-02	1,96E-02	1,44E-03	-6,27E-01
Abiotic depletion potential (ADP-elements) for non fossil resources	kg Sbe / kg	6,45E-05	1,48E-08	3,47E-08	2,15E-10	2,40E-08	2,08E-06	3,64E-09	-1,96E-05
Abiotic depletion potential (ADP-fossil fuels) for fossil resources (+A2)	MJ / kg	7,99E+01	9,80E-02	3,98E-02	5,79E-03	1,58E-01	3,23E-01	3,78E-02	-5,24E+00
Water use	m ³ e depr. / kg	1,06E+00	4,39E-04	6,81E-04	1,55E-05	7,10E-04	4,39E-03	1,44E-04	2,47E-01
Use of secondary materials	kg / kg	2,36E-01	2,73E-05	5,94E-05	2,27E-06	4,41E-05	2,56E-04	9,29E-06	4,36E-01
Biogenic carbon content in product	kg C / kg	0,00E+00	N/A	N/A	N/A	N/A	N/A	N/A	N/A

SEWATEK H-SERIES, METAL FRAME HM240-125/25

Impact category	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Global Warming Potential total	kg CO ₂ e / kg	2,97E+00	6,54E-03	1,79E-01	4,30E-04	8,65E-03	1,37E-02	1,29E-03	-3,91E-01
Abiotic depletion potential (ADP-elements) for non fossil resources	kg Sbe / kg	6,02E-05	1,48E-08	3,57E-08	2,14E-10	1,97E-08	1,28E-06	3,16E-09	-1,22E-05
Abiotic depletion potential (ADP-fossil)	MJ / kg	8,18E+01	9,82E-02	4,07E-02	5,79E-03	1,30E-01	2,44E-01	3,44E-02	-3,30E+00

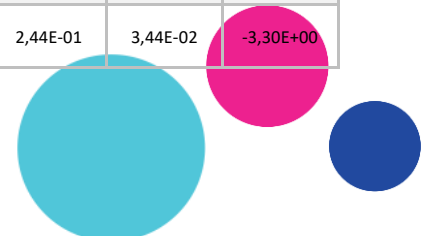

fuels) for fossil resources (+A2)									
Water use	m ³ e depr. / kg	1,31E+00	4,39E-04	6,95E-04	1,55E-05	5,83E-04	2,85E-03	1,24E-04	1,48E-01
Use of secondary materials	kg / kg	1,80E-01	2,72E-05	6,08E-05	2,27E-06	3,62E-05	1,67E-04	8,06E-06	2,69E-01
Biogenic carbon content in product	kg C / kg	0,00E+00	N/A	N/A	N/A	N/A	N/A	N/A	N/A

